

NEW – Enjoy 5 years of technical support, warranty and remote management on the AirLink® XR60 5G Router.
[Learn more →](#)

AirLink® XR60

Ultra-compact Rugged 5G and Wi-Fi 6 Cellular Router

The AirLink® XR60 is an ultra-compact, rugged 5G cellular router designed to deliver reliable, high-performance 5G and Wi-Fi 6 connectivity in space-constrained and harsh environments — from tight industrial enclosures to fast-moving vehicles.

Built for mission-critical applications, the XR60 supports advanced networking features, private network integration, and edge computing capabilities, enabling mission-critical organizations to future-proof their connectivity and accelerate digital transformation.

With AirLink Complete, the XR60 offers 5 years of hardware warranty, technical support, and secure remote management to keep your network online and optimized.



Dual-Band GNSS	5G
IP64 Rated	2x2 MIMO Wi-Fi 6
AirLink OS	(Optional)
5 years of AirLink Complete	Single Serial / Single Ethernet (1 Gbps) or Dual Ethernet (1 Gbps + 5 Gbps)

How to Buy

[View specifications →](#)



Enjoy 5 Years of Peace of Mind with Your AirLink® XR60 Router

When registered with AirLink Management Service (ALMS), the XR60 provides comprehensive support to keep your network running smoothly:

- ✓ 5-year hardware warranty for reliable, long-term performance
- ✓ 5 years of expert technical support to assist whenever you need it
- ✓ 5 years of remote device management through ALMS, enabling easy monitoring and configuration

Register today to maximize uptime and simplify your device management with the trusted AirLink® XR60

Learn more →

AirLink® XR60 – Router Specifications

KEY FEATURES	
Cellular Radios	5G
Wi-Fi	2x2 MIMO Wi-Fi 6 (Optional)
Ethernet	1 x Ethernet RJ45 (1 Gbps) – Single Serial/Single Ethernet variant 2 x Ethernet RJ45 (1x1 Gbps + 1x5 Gbps) – Dual Ethernet variant
Serial	Dual RS-232/485 (Serial/Ethernet variant)
GNSS	Dual-band 40 Channel GNSS
CAN	–
I/O	1 GPIO
USB	USB 3.2 Gen 1 Type-C® with power delivery and 5 Gbps LAN networking
Bluetooth	–
IP Rating	Sealed Aluminum Housing (IP64 Rated)
Services	AirLink Complete (5 years included when registered in ALMS)
Operating System	AirLink OS
Management System	AirLink Management Service (ALMS)

[← View Full Specs](#)

Region	Global
CELLULAR	
Technology	5G
Peak Downlink (Theoretical)	2800 Mbps
Peak Uplink (Theoretical)	900 Mbps
Category	5G
Region	Global
Radio	EM9291
MIMO	4x4
RF Connectors	SMA
SIM	Dual SIM (Nano-4FF)

FREQUENCY BANDS

	1	2	3	4	5	7	8	12	13	14	17	18	19	20	25	26	28	29	30
5G	n1	n2	n3	–	n5	n7	n8	n12	n13	n14	–	n18	–	n20	n25	n26	n28	n29 ¹	n30
4G	B1	B2	B3	B4	B5	B7	B8	B12	B13	B14	B17	B18	B19	B20	B25	B26	B28	B29	B30
3G (HSPA+)	B1	B2	–	B4	B5	–	B8	–	–	–	–	–	B19	–	–	–	–	–	–

FREQUENCY BANDS

	32	34	38	39	40	41	42	43	46	48	66	70	71	75	76	77	78	79
5G	–	–	n38	–	n40	n41	–	–	–	n48	n66	n70	n71	n75	n76	n77	n78	n79
4G	B32	B34	B38	B39	B40	B41	B42	B43	B46	B48	B66	–	B71	–	–	–	–	–
3G (HSPA+)	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

¹SA downlink only ²Downlink only

WIRELESS CERTIFICATION

Regulatory	FCC, IC/ISED, PTCRB, GCF, CE ¹ , RED ¹ , RCM
Carrier	AT&T, FirstNet® Trusted ² , T-Mobile, T-Priority, Verizon, Telus, Southern Linc, CBRS, C-BandPlanned: Rogers, Bell, Telstra
Public Safety	FirstNet® Trusted ² , T-Priority
Part Numbers	1105099 XR60 Dual Ethernet (1 Gbps + 5 Gbps) 1105159 XR60 Dual Ethernet (1 Gbps + 5 Gbps) with Wi-Fi 1105160 XR60 Single Serial, Single Ethernet (1 Gbps) 1105161 XR60 Single Serial, Single Ethernet (1 Gbps) with Wi-Fi TAA Part Numbers: 1105232 XR60 TAA Dual Ethernet (1 Gbps + 5 Gbps) 1105233 XR60 TAA Dual Ethernet (1 Gbps + 5 Gbps) with Wi-Fi 1105234 XR60 TAA Single Serial, Single Ethernet (1 Gbps) 1105235 XR60 TAA Single Serial, Single Ethernet (1 Gbps) with Wi-Fi

¹TAA Part Numbers do not have the CE/RED certification
²Requires device management via AirLink Management Service (ALMS)

WI-FI

Wi-Fi Standard	Wi-Fi 6
Access Point	Dual (2.4 & 5GHz)
Client (Depot/WAN)	Yes
Client & AP	Yes
Peak Throughput (Theoretical)	1200 Mbps
MIMO	Single 2x2
Security	WPA2/3 Personal WPA2/3 Transitional WPA2 Enterprise
Clients	Up to 32 maximum
SSID	3
Output Power	21 dBm per chain
Frequency	2.4/5 GHz
RF Connectors	SMA (Reverse Polarity)

ENVIRONMENTAL

Operating Temperature	-40°C to +75°C / -40°F to +167°F -30°C to +70°C / -22°F to +158°F (Wi-Fi variant)
Storage Temperature	-40°C to +85°C / -40°F to +185°F
Humidity	95% RH @ 60°C
Military Specification	MIL-STD-810H (Shock, Vibration, Thermal Shock, Humidity)
IP Rating	IP64

INDUSTRY CERTIFICATIONS

Safety	IECEE Certification Bodies Scheme (CB Scheme)
Vehicle Usage	E-Mark ¹ (UN ECE Regulation 10.05), ISO7637-2, SAE J1455 (Shock, Vibration, Electrical)
Environmental Directives	RoHS2, REACH, WEEE, Prop 65
Hazardous Environments	Class 1 Div 2– Ambient temperatures of -30°C to +60°C IECEx ² & ATEX ²
Rail Usage	EN50155/EN45545 (Rolling Stock)

¹ TAA Part Numbers do not have the E-Mark certification² TAA Part Numbers do not have IECEx/ATEX certification

POWER

Input Voltage	7 to 36 VDC Redundant power input via USB-C (45W)
Power Consumption	Idle Power: 3.5W (290 mA @ 12VDC) – Serial/Ethernet variant Standby Mode Power: 55 mW (4.6 mA @ 12 VDC) Triggered on low voltage, I/O or periodic timer
Power Modes	7 to 36 VDC: Low voltage disconnect to prevent battery drain Built-in protection against voltage transients including 5VDC engine cranking and +200 VDC load dump Ignition Sense with time delay shutdown Configurable features and ports to optimize power consumption Can switch to redundant power input via USB-C (45W)

NETWORK AND ROUTING

Throughput	800 Mbps Firewall TCP throughput
Features	Semtech Cognitive Wireless IPv4 and IPv6 Routing Network Address Translation (NAT) Port Forwarding DHCP Server IP Passthrough LAN Segmentation IPv4 Passthrough and IPv6 Prefix Extension WAN/LAN Connection Policy Management Policy-Based Routing Configurable MTU size Static Routing WAN Ethernet
QoS	Application/Traffic Priority Queuing
WAN Monitors	Connection Failure Recovery

SECURITY

AAA	Wi-Fi 802.1x/Radius authentication
Firewall	Stateful firewall with port forwarding, DMZ
WLAN Encryption	WPA2/3 Personal WPA2/3 Transitional WPA2 Enterprise
Firmware Update	Secure Firmware Update

LAN (ETHERNET/USB)

	USB to Ethernet
--	-----------------

VPN

Throughput	175 Mbps IPSec VPN TCP throughput
Features	Integrates with VPN servers with IPsec protocols with IKEv1/IKEv2 FIPS 140-2 Level 1 compliance
Encryption	AES128/AES192/AES256
Hashing	SHA256/SHA384/SHA512
Key Exchange	DHGroup14/15/16/17/18/19/20/21
	LAN to LAN and Host to LAN Up to 10 concurrent tunnels per link MOBIKE protocol IP compression Full/Split Tunnel Dead Peer Detection (DPD)

ROUTER MANAGEMENT INTERFACES

	ALMS Local web user interface REST API (Beta) licensed via ALMS
--	---

EDGE COMPUTING

	Support for Edge Compute Docker Containerized Applications licensed via ALMS
RAM ^{1,2}	1.2 GB
Storage (Flash) ¹	750 MB
CPU	Quad Core Arm A53 64 bit

¹ Approximation available to containers (not device total)² Depends on other enabled features**AIRLINK COMPLETE (5 YEARS INCLUDED WITH ROUTER PURCHASE)**

Support	24/7 technical support*
Hardware Warranty	1-year standard hardware warranty Extended hardware warranty up to 5 years with current subscription**
Device Management	AirLink Management Service (ALMS)*
Software Updates	Unrestricted critical firmware updates through at least December 31st, 2029

*With current AirLink Complete subscription

Full warranty terms are available at www.sierrawireless.com/end-user-warrantyAIRLINK PREMIUM (OPTIONAL UPGRADE)
INCLUDES ALL AIRLINK COMPLETE FEATURES* AND ADDS:**

Advanced Mobility Reporting	Coverage and fleet reporting*
Advance Replacement	Same-day shipping for in-warranty router replacements*

*With current AirLink Premium subscription

RELIABILITY


MTBF	1105099 XR60 Dual Ethernet: 264010 hours (30.13 years)
	1105159 XR60 Dual Ethernet, Wi-Fi: 245227 hours (27.99 years)
	1105160 XR60 Serial, Ethernet: 283666 hours (32.38 years)
	1105161 XR60 Serial, Ethernet, Wi-Fi: 262094 hours (29.91 years)
*Ground Benign, 25°C	
*MTBF calculations performed per Telcordia “Reliability Prediction Procedure for Electronic Equipment” document number SR-332, Method I, Issue 3	

ACCESSORIES

In The Box	XR60, DC Power Cable, Quick Start Guide, AirLink Complete Leaflet
Other Accessories (sold separately)	6001503 AC Adapter 6001502 Spare DC Power Cable 6001529 DIN Rail Bracket 6001410 RJ45 to Single DB9 6001409 RJ45 to Dual DB9 For Antenna options visit: here

DIMENSIONS

Size	118 x 39 x 98 mm (108 mm including SMA connectors) 4.6 x 1.5 x 3.9 in (4.2 in including SMA connectors) Same bolt pattern as RV
Weight	522 g / 1.15 lb with Wi-Fi

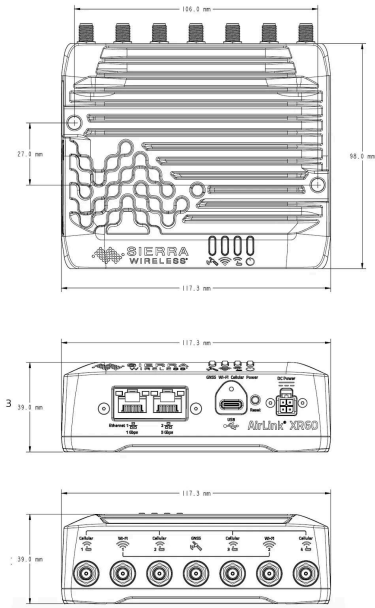

*For carrier specific band support please refer to the hardware user guide.